

94126 Pressure Vent

The Shand & Jurs 94126 Pressure Vent is designed to relieve pressure on low pressure storage tanks, and is ideally suited as a low cost rim vent on floating roof tanks. Also, it is suitable as an auxiliary pressure or emergency vent on small low pressure tanks. The Model 94126 is available in a 6-inch size only, with screwed connection.

Specifications

Standard Setting:

1/2 oz./sq.²

Connection:

6" NPT

Materials of Construction

Body:

Cast Aluminum

Cover:

Cast Aluminum

Weather Hood:

Aluminum

Screen:


Galvanized Steel, 316 Stainless Steel



Features

- Economical
- Ideally Suited for Rim Vent
- Easy Installation
- Available in 6" Size

Dimensions:

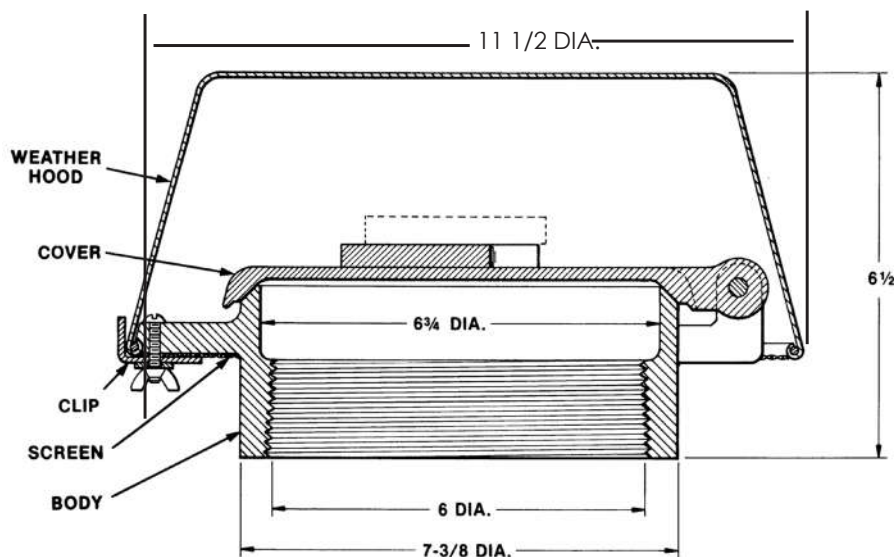

All designs subject to change. Certified dimensions and specifications available upon request.

94126 Ordering Guide

Model Number Selection

The model number will consist of a base number **94126** followed by 2 digit numbers. These digits will represent 1 option table.

94126 - AB

Ordering Information

Specify:

1. Model 94126 Pressure Vent
2. Size
3. Setting, if other than standard
4. To Specify CE for Ordinary Locations use Table B3
5. ATEX Certification for II 1 G Ex h II B T1...T6 Ga EU Locations use Table B2



Table AB - Size and Setting

Option AB	Description
01	Standard Settings
11	Non-Standard Settings
02	ATEX - Standard Settings
12	ATEX - Non-Standard Settings
03	CE - Standard Settings
13	CE - Non-Standard Settings

Materials of Construction

Body:	Cast Aluminum
Weather Hood	Aluminum
Cover	Cast Aluminum
Screen	Galvanized Steel Table B=1; 3
Screen	316 SS Table B=2

Pressure Settings

1/2 oz./in. ² (0.865" W.C.)	Standard Setting
5.7 oz./in. ² (10" W.C.)	Maximum Setting